
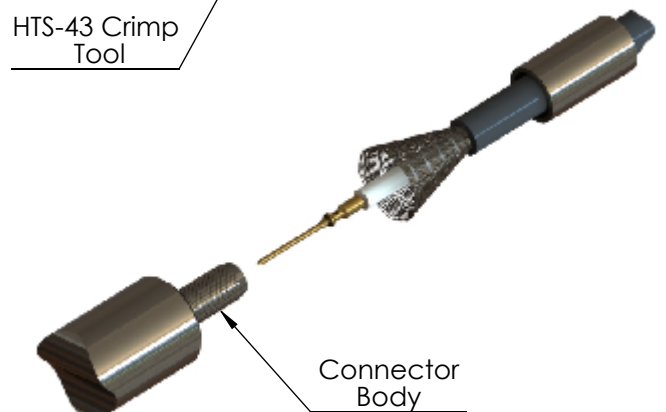
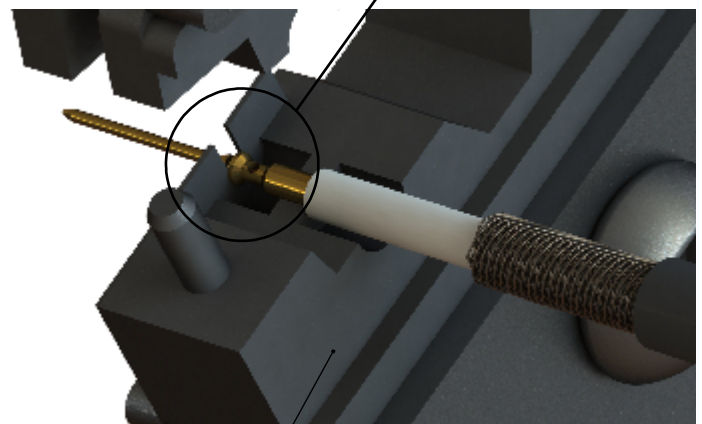
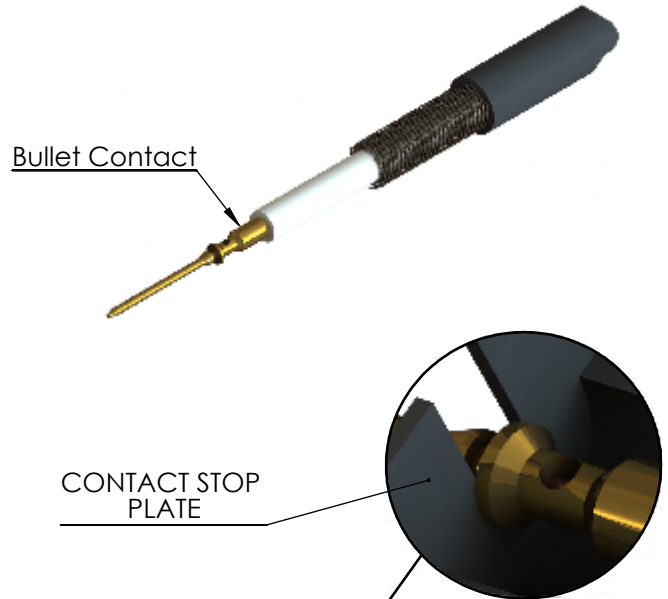



ASSEMBLY PROCEDURE : AP050

- Slide the crimp sleeve onto the cable.
- Strip the cable to the dimensions given on the connectors datasheet. If the cable has a foil screen please check the datasheet for the stripping length of this screen.
- Slide the Bullet Contact onto the cable conductor up to cable dielectric. If the conductor is of stranded construction, ensure all the strands have entered the contact.
- Ensure that the conductor is visible through the contact's inspection hole.
- Carefully place Cable and Bullet Contact assembly into the crimp tool. The first groove after the ramp at the front of the contact should be placed into the slot in the Contact Stop Plate. Push the Bullet Contact forward until the flange of the Bullet Contact butts up against the plate as shown. Crimp the centre contact. Remove and carefully check the crimp joint.
- Fan the cable braid out. On foil screened cables the foil must remain around the cables dielectric, and pass inside the connectors rear bore. It must never be placed over the knurled area, as the tapes often used in the construction of this screen could insulate all the screens from the connector.
- Slide the cable into the connector and push home until the Bullet Contact engages into place in the connectors Centre Contact. Ensure all the braid strands pass outside over the knurled area of the connector.

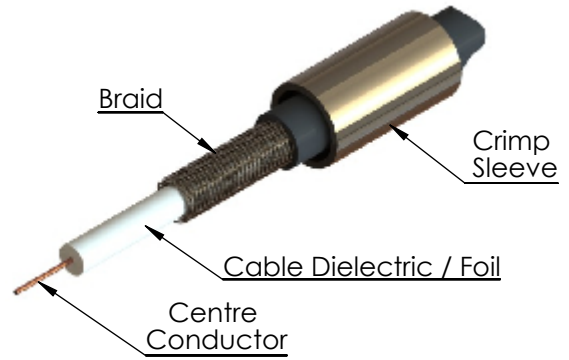


© 2010. THIS DOCUMENT IS THE PROPERTY OF OWNER. REPRODUCTION OR COMMUNICATION IN ANY FORM TO A THIRD PARTY IS PROHIBITED WITHOUT PRIOR WRITTEN CONSENT


A4	SHEET 1 OF 2	 <small>2002/95/EC</small>	DIMENSIONS ARE IN MILLIMETERS		
REVISION :	A00		NAME	SIGNATURE	DATE
ISSUE :	1	DRAWN	GE		20/07/2016
		CHK'D	IG		20/07/2016
		APPV'D			
<small>THE INFORMATION IS GIVEN AS AN INDICATION ONLY AND IS SUBJECT TO CHANGE WITHOUT NOTICE. IN THE CONTINUAL GOAL TO IMPROVE OUR PRODUCTS, WE RESERVE THE RIGHT TO MAKE ANY MODIFICATIONS NECESSARY WITHOUT PRIOR NOTICE.</small>					

ASSEMBLY PROCEDURE : AP050


9. Slide the crimp sleeve forward over the braid and knurled area of the connector to the rear of the connector body.
10. Crimp the crimp sleeve using the appropriate sized crimp tool given on the connectors datasheet (trim excess braid if necessary)

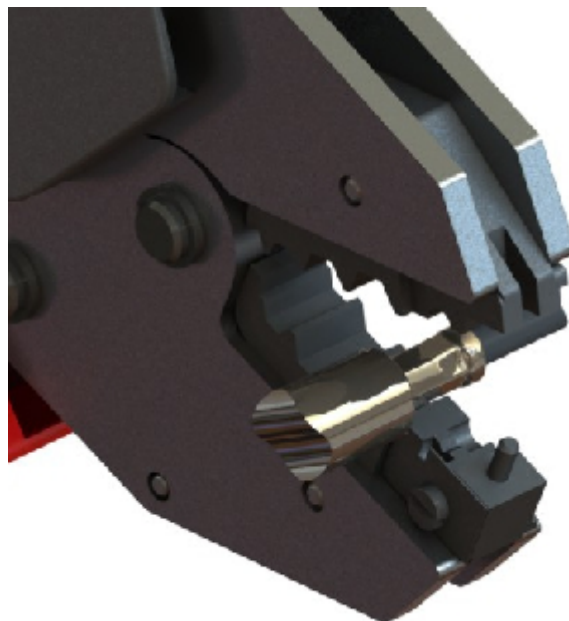

11. Carefully check the assembly.

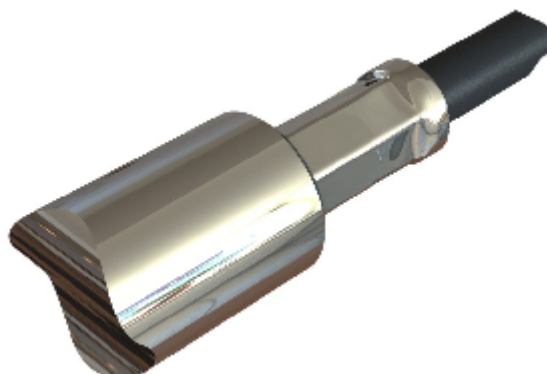

© 2010. THIS DOCUMENT IS THE PROPERTY OF OWNER. REPRODUCTION OR COMMUNICATION IN ANY FORM TO A THIRD PARTY IS PROHIBITED WITHOUT PRIOR WRITTEN CONSENT

A4	SHEET 2 OF 2		DIMENSIONS ARE IN MILLIMETERS		
REVISION :	A00	NAME	SIGNATURE	DATE	
ISSUE :	1	DRAWN	GE		20/07/2016
		CHK'D	IG		20/07/2016
		APPV'D			
6-8 COLNE ROAD, TWICKENHAM, MIDDLESEX. TW1 4JR		<small>THE INFORMATION IS GIVEN AS AN INDICATION ONLY AND IS SUBJECT TO CHANGE WITHOUT NOTICE. IN THE CONTINUAL GOAL TO IMPROVE OUR PRODUCTS, WE RESERVE THE RIGHT TO MAKE ANY MODIFICATIONS NECESSARY WITHOUT PRIOR NOTICE.</small>			