



ASSEMBLY PROCEDURE : AP002


1. Slide the crimp sleeve onto the cable.
2. Strip the cable to the dimensions given on the connectors datasheet. If the cable has a foil screen please check the datasheet for the stripping length of this screen.

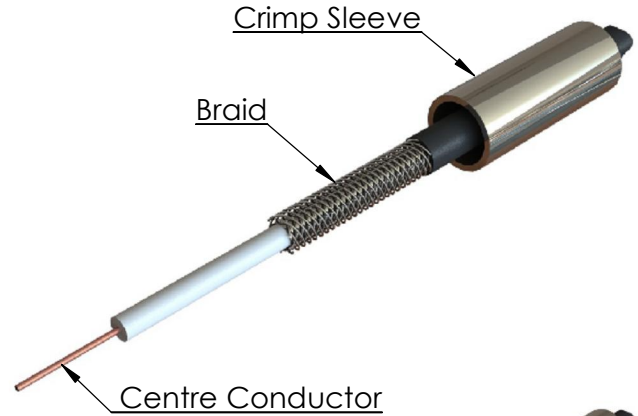


3. Fan the braid out slightly. Push the white sleeve carefully over the dielectric and foil if applicable, but under the braid as shown. Slightly rotating the sleeve in the direction of the wrap of the foil as its inserted will help to keep the foil against the dielectric. Ensure centre contact fully emerges undamaged from the end of the sleeve.

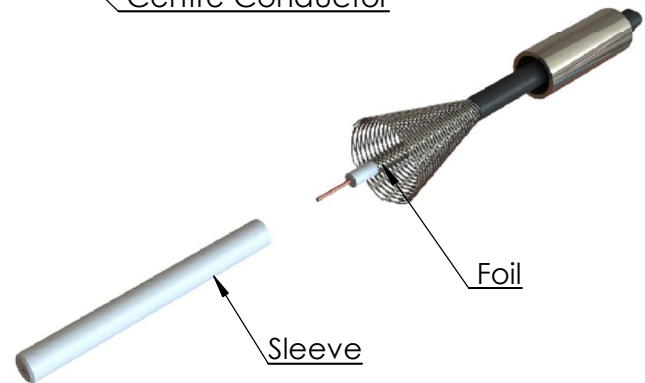


4. Slide the centre contact onto the cable conductor up to cable dielectric. If the conductor is of stranded construction, ensure all the strands have entered the contact.
5. Ensure that the conductor is visible through the contact's inspection hole.

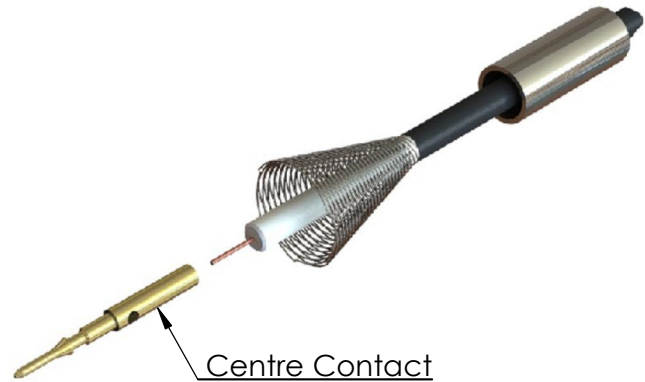

6. Crimp the centre contact using the appropriate sized crimping tool given in the datasheet. Carefully check the joint.

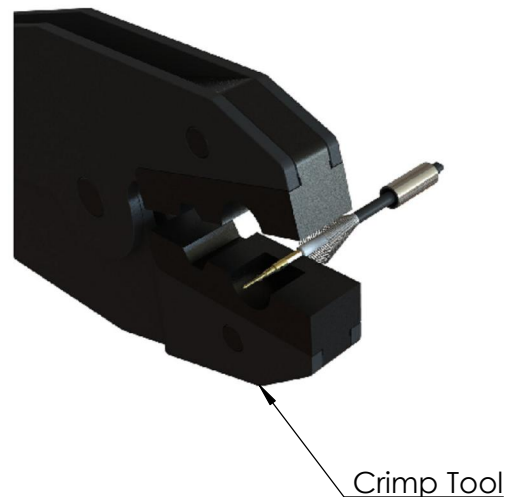


© 2010. THIS DOCUMENT IS THE PROPERTY OF OWNER. REPRODUCTION OR COMMUNICATION IN ANY FORM TO A THIRD PARTY IS PROHIBITED WITHOUT PRIOR WRITTEN CONSENT

| | | | | | |
|---|---------------------|---|--------------------------------------|-------------|------------|
| A4 | SHEET 1 OF 2 |  | DIMENSIONS ARE IN MILLIMETERS | | |
| REVISION : | A00 | NAME | SIGNATURE | DATE | |
| ISSUE : | 1 | DRAWN | GE | | 05/12/2010 |
| | | CHK'D | IG | | 05/12/2010 |
| | | APPV'D | | | |
| <p>6-8 COLNE ROAD, TWICKENHAM, MIDDLESEX. TW1 4JR</p> <p>THE INFORMATION IS GIVEN AS AN INDICATION ONLY AND IS SUBJECT TO CHANGE WITHOUT NOTICE. IN THE CONTINUAL GOAL TO IMPROVE OUR PRODUCTS, WE RESERVE THE RIGHT TO MAKE ANY MODIFICATIONS NECESSARY WITHOUT PRIOR NOTICE.</p> | | | | | |

ASSEMBLY PROCEDURE : AP002

- Slide the cable into the connector and push home until the centre contact "CLICKS" into place in the connectors dielectric. Ensure all the braid strands pass outside over the knurled area of the connector.

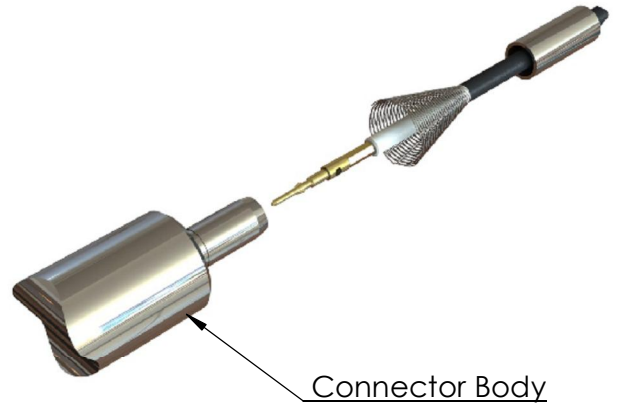


- Slide the crimp sleeve forward over the braid and knurled area of the connector to the rear of the connector body.
- Crimp the crimp sleeve using the appropriate sized crimp tool given on the connectors datasheet (trim excess braid if necessary)



- Carefully check the assembly.



© 2010. THIS DOCUMENT IS THE PROPERTY OF OWNER. REPRODUCTION OR COMMUNICATION IN ANY FORM TO A THIRD PARTY IS PROHIBITED WITHOUT PRIOR WRITTEN CONSENT

| | | | | | |
|--|---------------------|---|--------------------------------------|-------------|------------|
| A4 | SHEET 2 OF 2 |  | DIMENSIONS ARE IN MILLIMETERS | | |
| REVISION : | A00 | NAME | SIGNATURE | DATE | |
| ISSUE : | 1 | DRAWN | GE | | 05/12/2010 |
| | | CHK'D | IG | | 05/12/2010 |
| | | APPV'D | | | |
| 6-8 COLNE ROAD, TWICKENHAM, MIDDLESEX. TW1 4JR | | | | | |
| <small>THE INFORMATION IS GIVEN AS AN INDICATION ONLY AND IS SUBJECT TO CHANGE WITHOUT NOTICE. IN THE CONTINUAL GOAL TO IMPROVE OUR PRODUCTS, WE RESERVE THE RIGHT TO MAKE ANY MODIFICATIONS NECESSARY WITHOUT PRIOR NOTICE.</small> | | | | | |